



# 6.6.B

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE

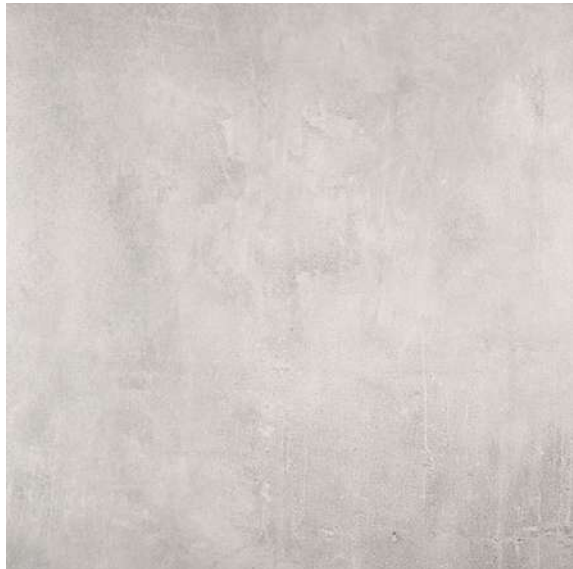


Concrete Look  
High Slip, GresGrip™  
EPD Group 3 - Rhine Range

## GresGrip™ Natural


### Properties




Carbon Offset




Chemical Resistant




Frost Resistant




Thermal Shock Resistant




More Colours Available




EPD GROUP 3  
RHINE




LEED




BREEAM




EMAS




ISO 9001




ISO 14001



R10




PTV 40+




OVER 40%  
Recycled Content


### Other formats available



20mm  
Paver



Mosaic



Decor

### Other finishes available




GresGrip™  
R11



Natural

### Sizes available

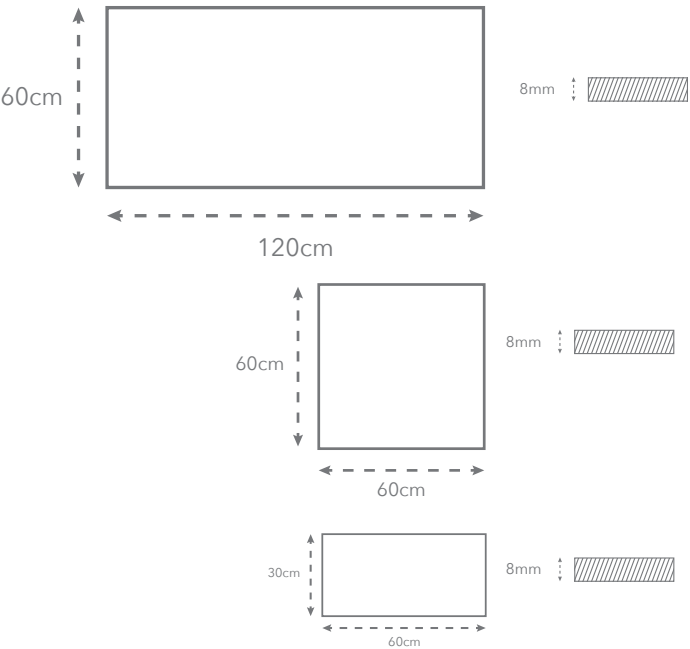




ECO FRIENDLY  
TILES®  
*The planet, covered*

[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)


Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
[info@ecofriendlytiles.co.uk](mailto:info@ecofriendlytiles.co.uk)

# 6.6.B

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.

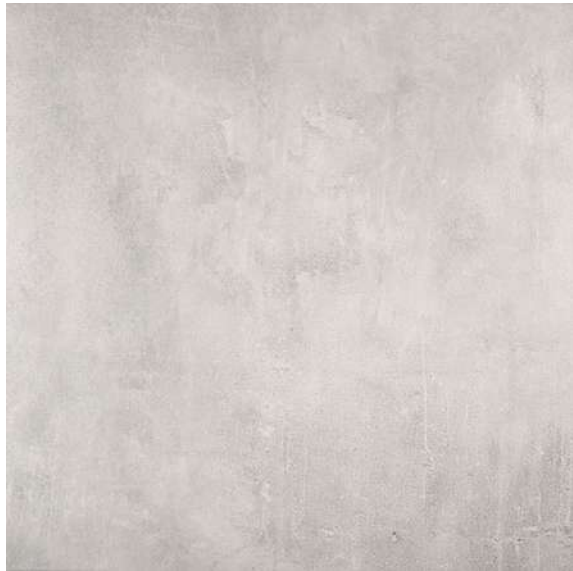


MOBILE SAMPLE LIBRARY REFERENCE





Concrete Look  
High Slip  
EPD Group 3 - Rhine Range


## Natural


### Properties


  
Carbon Offset


  
Chemical Resistant


  
Frost Resistant


  
Thermal Shock Resistant


  
More Colours Available


  
EPD GROUP 3  
RHINE


  
LEED


  
BREEAM

  
EMAS


  
ISO 9001


  
ISO 14001


  
R10

  
OVER 40%  
Recycled Content

### Other formats available

  
20mm  
Paver

  
Mosaic

  
Decor


### Other finishes available


  
GresGrip™  
Natural

  
GresGrip™  
R11

### Sizes available


100cm




6mm 

150cm


100cm




6mm 

100cm


75cm




6mm 

150cm

75cm



6mm 

75cm

[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)



ECO  
FRIENDLY  
TILES®  
*The planet, covered*

Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
[info@ecofriendlytiles.co.uk](mailto:info@ecofriendlytiles.co.uk)

# Technical Specification

## Code: 6.6.B



Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
info@ecofriendlytiles.co.uk  
[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)

Physical & chemical properties	Norm/test method	Required Standard	Results
Length and Width	EN ISO 10545-2	± 0.6% max	±0.2% max
Thickness	EN ISO10545-2	±5.0% max	±5.0% max
Water Absorption	EN ISO 10545-3	≤0.5%	<0.05%
Resistance to Deep Abrasion	EN ISO 10545-6	≤175N/mm <sup>2</sup>	140mm <sup>2</sup>
Thermal Expansion Coefficient	EN ISO 10545-8	-	7MK <sup>1</sup>
Frost Resistance	EN ISO 10545-12	-	Frost Resistance
Chemical Resistance	EN ISO 10545-13	UB min.	Uneffected
Slip Resistance	DIN51130	-	R10
	BS 7976-2:2002 Pendulum	-	PTV 36+/PTV 40+
			* Please note that the 6mm thickness tiles do not have GresGrip™ Natural finish. They are a Natural finish and still offer R10 slip rating.
			** 60x120cm, 60x60cm and 30x60cm have GresGrip™ Natural finish which offers a slip rating of R10, PTV 40+

### Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.