

## 6.7.C

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







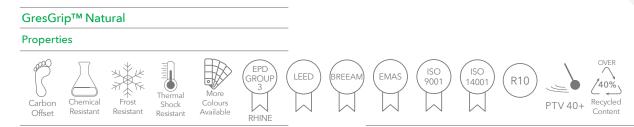


Other finishes available

### Other formats available



Mosaic

#### Sizes available

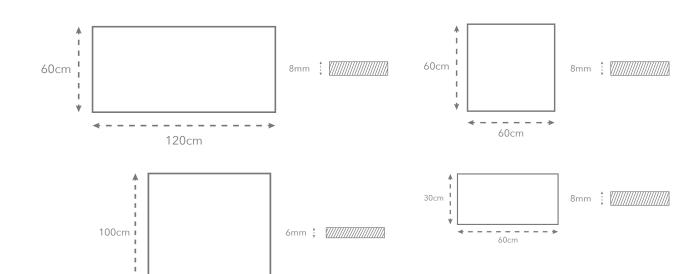

100cm



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

www.ecofriendlytiles.co.uk

0844 980 2233 info@ecofriendlytiles.co.uk

# Technical Specification Code: 6.7.C



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Length and Width	EN ISO 10545-2	± 0.6% max	±0.2% max
Thickness	EN ISO10545-2	±5.0% max	±5.0% max
Water Absorption	EN ISO 10545-3	≤0.5%	<0.05%
Bending Strength	EN ISO 10545-4	≥35N/mm²	>42N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤175N/mm²	140mm²
Thermal Expansion Coefficient	EN ISO 10545-8	-	7MK <sup>-1</sup>
Thermal Shock Resistance	EN ISO 10545.9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Frost Resistance
Chemical Resistance	EN ISO 10545-13	-	Uneffected
Slip Resistance	DIN51130		R10
	BS 7976-2:2002 Pendulum		PTV 40+

#### Certifications













