


# 6.8.APAV

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE

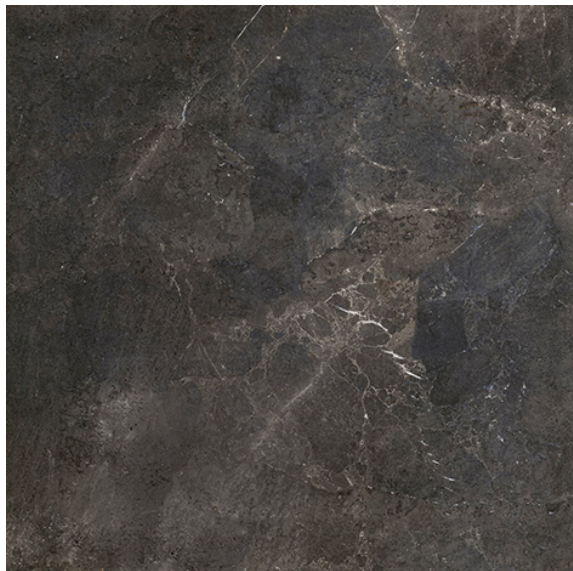


Stone Look Paver  
High Slip, GresGrip™  
EPD Group 3 - Rhine Range

## GresGrip™ Natural


### Properties




Carbon Offset




Chemical Resistant




Frost Resistant




Thermal Shock Resistant




More Colours Available




EPD GROUP 3  
RHINE




LEED




BREEAM




EMAS




ISO 9001




ISO 14001



R11




PTV 40+




OVER 40%  
Recycled Content


### Other formats available



Solid



Mosaic



Decor

### Other finishes available




GresGrip™  
Natural



GresGrip™  
R11

### Sizes available

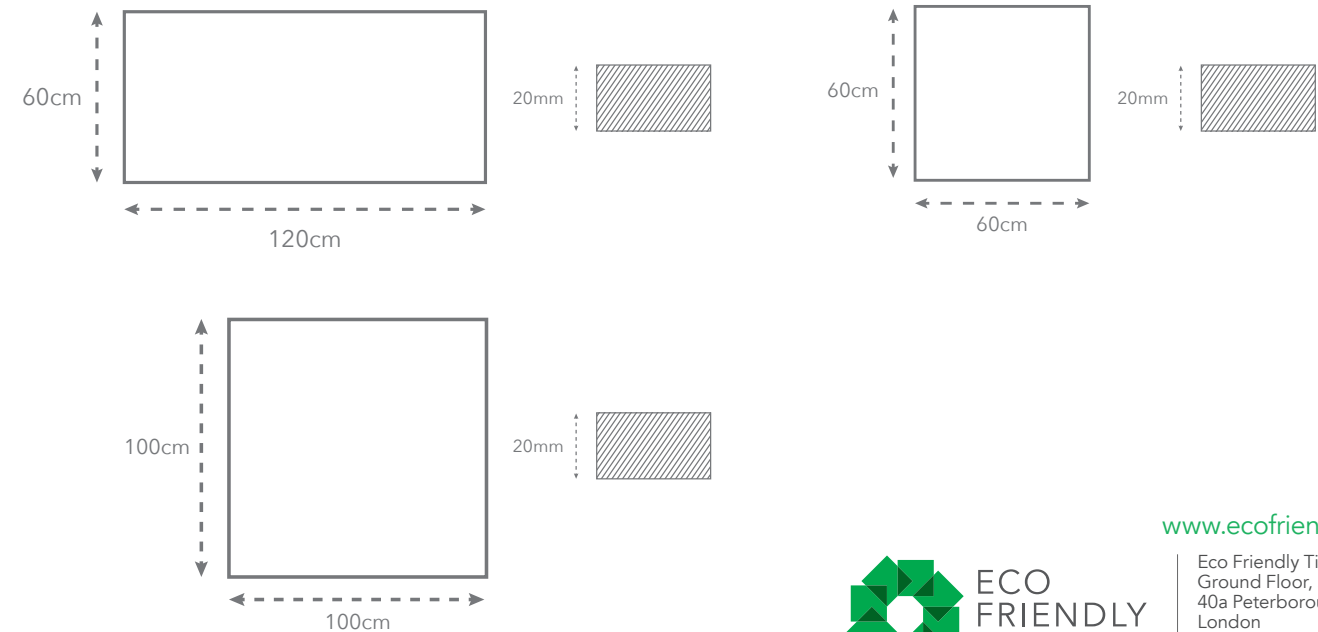



ECO FRIENDLY  
TILES®  
*The planet, covered*

[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)

Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
info@ecofriendlytiles.co.uk



Physical & chemical properties	Norm/test method	Required Standard	Results
Length and Width	EN ISO 10545-2	± 0.6% max	±0.2% max
Thickness	EN ISO10545-2	±5.0% max	±5.0% max
Water Absorption	EN ISO 10545-3	≤0.5%	<0.05%
Bending Strength	EN ISO 10545-4	≥35N/mm²	>42N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤175N/mm²	140mm²
Thermal Expansion Coefficient	EN ISO 10545-8	-	7MK <sup>-1</sup>
Thermal Shock Resistance	EN ISO 10545.9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Frost Resistance
Chemical Resistance	EN ISO 10545-13	-	Uneffected
Slip Resistance	DIN51130		R11
	BS 7976-2:2002 Pendulum		PTV 40+

UNI EN ISO 14001

**CERTQUALITY**

SISTEMA DI GESTIONE  
AMBIENTALE CERTIFICATO

EU  
Ecolabel

[www.ecolabel.eu](http://www.ecolabel.eu)

**CE**

EN 14411

U.S. GREEN BUILDING COUNCIL  
LEED  
v3000

GREEN BUILDING COUNCIL  
SOCIO  
ITALIA

CCC

UNI EN ISO 9001:2008

**CERTQUALITY**

SISTEMA DI GESTIONE  
QUALITÀ CERTIFICATO

This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.