


6.8.A

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE





Stonee Look
High Slip, GresGrip™
EPD Group 3 - Rhine Range


GresGrip™ Natural


Properties



Carbon Offset



Chemical Resistant



Frost Resistant



Thermal Shock Resistant



More Colours Available



EPD GROUP 3
RHINE



LEED



BREEAM



EMAS


ISO 9001



ISO 14001



R10



PTV 40+


OVER 40%
Recycled Content

Other formats available


20mm
Paver

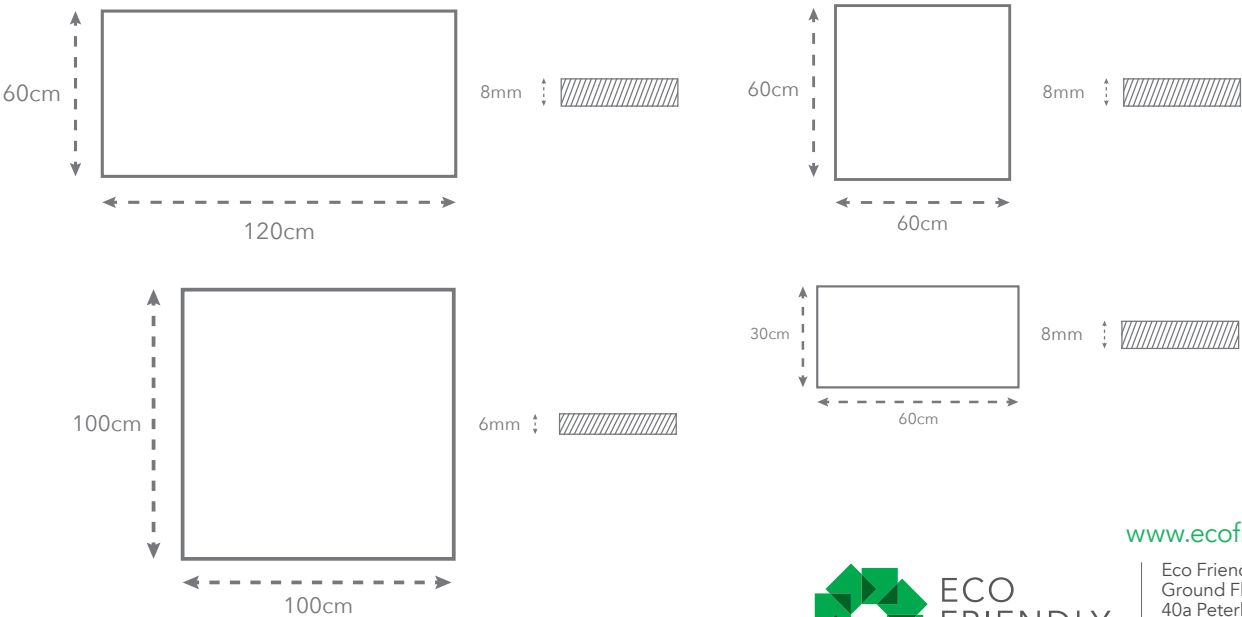

Mosaic


Decor

Other finishes available


GresGrip™
R11

Sizes available



www.ecofriendlytiles.co.uk



ECO
FRIENDLY
TILES®
The planet, covered

Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN
0844 980 2233
info@ecofriendlytiles.co.uk



| Physical & chemical properties | Norm/test method | Required Standard | Results |
|--------------------------------|-------------------------|-------------------|-------------------|
| Length and Width | EN ISO 10545-2 | ± 0.6% max | ±0.2% max |
| Thickness | EN ISO10545-2 | ±5.0% max | ±5.0% max |
| Water Absorption | EN ISO 10545-3 | ≤0.5% | <0.05% |
| Bending Strength | EN ISO 10545-4 | ≥35N/mm² | >42N/mm² |
| Resistance to Deep Abrasion | EN ISO 10545-6 | ≤175N/mm² | 140mm² |
| Thermal Expansion Coefficient | EN ISO 10545-8 | - | 7MK ⁻¹ |
| Thermal Shock Resistance | EN ISO 10545.9 | - | Resistant |
| Frost Resistance | EN ISO 10545-12 | - | Frost Resistance |
| Chemical Resistance | EN ISO 10545-13 | - | Uneffected |
| Slip Resistance | DIN51130 | | R10 |
| | BS 7976-2:2002 Pendulum | | PTV 40+ |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.