

# 9.4.C

Our EPD Group 4 - Shannon Range are a selection of Ultra-thin - from just 3.5mm - yet so strong it can be laid in 3m x 1m slabs on floors, walls or as an overlay. With low embodied carbon, up to 40% pre-consumer recycled content, flexible sizes and over one hundred colours and finishes, it's time to join the surface revolution. With a LEED and product specific EPD certifications, it's a range perfectly in step with 21st century living.



MOBILE SAMPLE LIBRARY REFERENCE  
Metallic/Oxide Look  
BREEAM/LEED

## Natural

### Properties

Carbon Offset

Chemical Resistant

Frost Resistant

Thermal Shock Resistant

More Colours Available

BREEAM

EPD GROUP 4  
SHANNON

LEED

SKA

ISO 14001

R9

UPTO 30%  
Recycled Content


Pre Consumer  
Recycled Content

### Other formats available

### Other finishes available

### Sizes available

3.5mm ♦ Wall (with mesh)

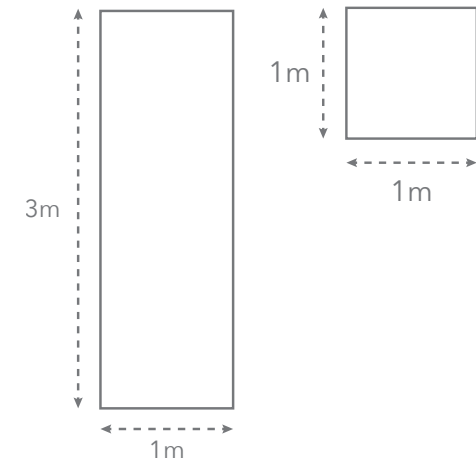

ECO FRIENDLY FACADES  
Facade Code: 009 Oxide Red-Brown  
www.ecofriendlyfacades.co.uk

ECO FRIENDLY  
TILES®

The planet, covered

[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)

Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
info@ecofriendlytiles.co.uk

# Technical Specification

## Code: 9.4.C



Eco Friendly Tiles Limited  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
info@ecofriendlytiles.co.uk  
[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)

### Certifications



Physical & chemical properties	Norm/test method	Shannon 3.5mm
Length & Width (1000x3000 mm)	ISO 10545-2	Max. deviation on the side +/- 0.5mm
(1200x3000 mm)	ISO 10545-2	-
(1620x3240 mm)	ISO 10545-2	-
Difference between diagonals	Factory	Max. +/- 1.5mm
Weight	Factory	Average value 8.2kg/m <sup>2</sup>
Surface quality/% of tiles with no visible flaws	ISO 10545-2	> 95%
Water absorption	ISO 10545-3 / ASTM C373	Average value 0.1%
Breaking strength in N (samples 1000x1000mm)	ISO 10545-4	Average value 700
Modulus of rupture in N/mm <sup>2</sup> (samples 1000x1000mm)	ISO 10454-4	Average value 50
Resistance to deep abrasion	ISO 10545-6	≤ 175mm <sup>3</sup>
Coefficient of linear thermal expansion / 10 <sup>-6</sup> / 0°	ISO 10545-8	Average value 6.6
Resistance to thermal shock	ISO 10545-9	Compliant
Resistance to freeze-thaw	ISO 10545-12	Compliant
Chemical resistance	ISO 10545-13	Class: from A to B
Stain resistance	ISO 10545-14	Class: from 4 to 5
Coefficient of friction	DIN 51130	R9
	BS 7976-2:2002 Pendulum	-
Fire reaction	EN 13501 (rev. 2005)	A2 - s1, d0