
VT.576

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



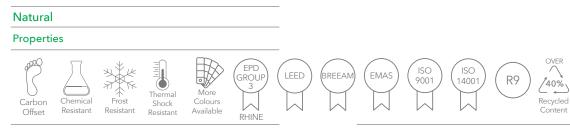


Other formats available

Other finishes available




Sizes available







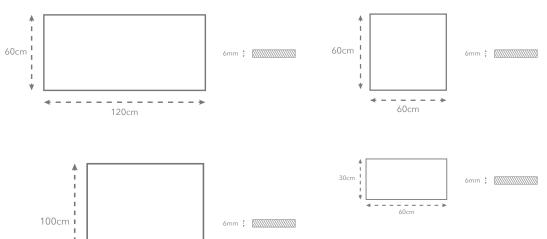

100cm

ECO FRIENDLY

The planet, covered


Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN


www.ecofriendlytiles.co.uk


0844 980 2233 info@ecofriendlytiles.co.uk


VT.576 ACCENTS


Accents available

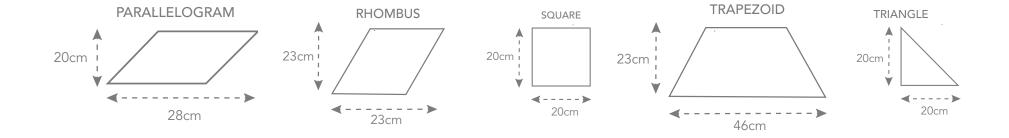









Technical Specification Code: VT.576



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0% max
Length and Width	EN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.2% max
Linearity	EN ISO 10545-2	± 0.6% / ± 2.0mm	± 0.2% max
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2% max
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 42 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175N/mm³	140 mm³
Thermal Expansion Coefficient	EN ISO 10545-8	-	7MK ⁻¹
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	Min. Class B	Unaffected
Resistance to Stains	EN ISO 10545-14	Declared Value	Class 5
Slip Resistance	DIN 51130	-	R9
	BS 7976-2:2002 Pendulum	-	-

Certifications











