# VT.582

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip<sup>™</sup> finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.





RHINE

100cm

## Other formats available


Other finishes available



## Sizes available





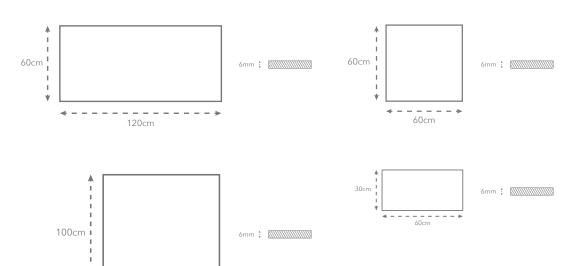

## www.ecofriendlytiles.co.uk



/40% ·


Recycled Content


> Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN


0844 980 2233 info@ecofriendlytiles.co.uk


# **VT.582 ACCENTS**


Accents available

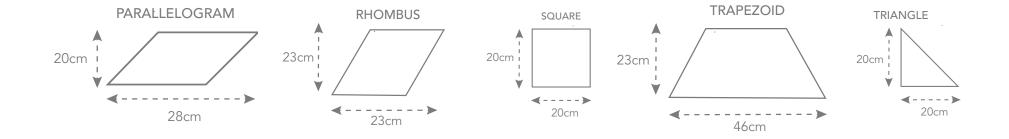









# Technical Specification Code: VT.582



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0% max
Length and Width	EN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.2% max
Linearity	EN ISO 10545-2	± 0.6% / ± 2.0mm	± 0.2% max
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2% max
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 42 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175N/mm³	140 mm³
Thermal Expansion Coefficient	EN ISO 10545-8	-	7MK <sup>-1</sup>
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	Min. Class B	Unaffected
Resistance to Stains	EN ISO 10545-14	Declared Value	Class 5
Slip Resistance	DIN 51130	-	R9
	BS 7976-2:2002 Pendulum	-	-

## Certifications













