
## VT.449


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



Terrazzo Look

Natural Properties UP TO BREEAM LEED EMAS R10 45% More Therma Carbon Chemical Frost Colours PTV 36+ Recycled Shock Offset Resistant Resistant Resistant Available Content Other formats Other finishes /// Bush Polished Mosaic Decor Hammered Sizes available

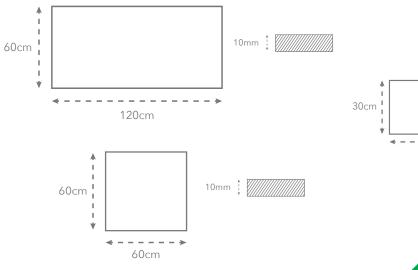

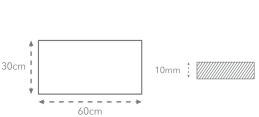

## www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: VT.449



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN 0844 980 2233

info@ecofriendlytiles.co.uk
www.ecofriendlytiles.co.uk

| Physical & chemical properties          | Norm/test method        | Required Standard                     | Results                               |
|---|-------------------------|---------------------------------------|---------------------------------------|
| Thickness                               | EN ISO 10545-2          | ± 5.0% / ± 0.5mm                      | ± 5.0%                                |
| Length and Width                        | IEN ISO 10545-2         | ± 0.5% / ± 1.5mm                      | ± 0.2%                                |
| Rectangularity                          | EN ISO 10545-2          | ± 0.5% / ± 2.0mm                      | ± 0.2%                                |
| Warpage                                 | EN ISO 10545-2          | ± 0.5% / ± 2.0mm                      | ± 0.2%                                |
| Water absorption                        | EN ISO 10545-3          | ≤ 0.5%                                | ≤ 0.06%                               |
| Flexion Resistance                      | EN ISO 10545-4          | ≥ 35 N/mm <sup>2</sup>                | ≥ 50 N/mm <sup>2</sup>                |
| Abrasion Resistance                     | EN ISO 10545-6          | 175mm <sup>3</sup>                    | 142mm <sup>3</sup>                    |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8          | ≤ 9x10 <sup>-6</sup> °C <sup>-1</sup> | 6.5x10 <sup>-6</sup> °C <sup>-1</sup> |
| Frost Resistance                        | EN ISO 10545-12         | UB Min.                               | Resistant                             |
| Resistance to Chemicals                 | EN ISO 10545-13         | GB Min                                | Resistant                             |
|   | EN ISO 10545-14         | Min Class 3                           | Class 5                               |
| Slip Resistance                         | DIN 51130               | -                                     | R10                                   |
|   | BS 7976-2:2002 Pendulum | -                                     | PTV 36+                               |

Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.