VT.371

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.









Properties Carbon Chemical Frost Resistant Resistant Resistant Resistant Other formats available Other formats available Properties LEED BREEAM COLABEL SOLABEL SOLABEL SOLABEL OTHER SOLABEL SOLA


Sizes available

Mosaic

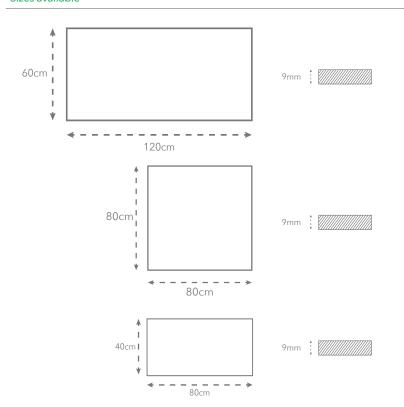







www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.371



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 35 N/mm²
Impact Resistance	EN ISO 10545-5	-	> 0.75
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 7.1*10 ⁻⁶ °C ⁻¹
Resistance to Thermal Shocks	EN ISO 10545-9	-	Complies
Resistance to Crazing	EN ISO 10545-11	-	Complies
Frost Resistance	EN ISO 10545-12	UB Min.	Complies
Resistance to Chemicals	EN ISO 10545-13	Declared Value	G A
Resistance to Stains	EN ISO 10545-14	-	Minimum Class 5
Slip Resistance	DIN 51130	-	R10
	BS 7976-2:2002 Pendulum	-	

Certifications











