## **VT.373**

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







#### Natural

#### **Properties**

















Other finishes






Recycled Content


#### Other formats available




Decor Mosaic

#### Sizes available

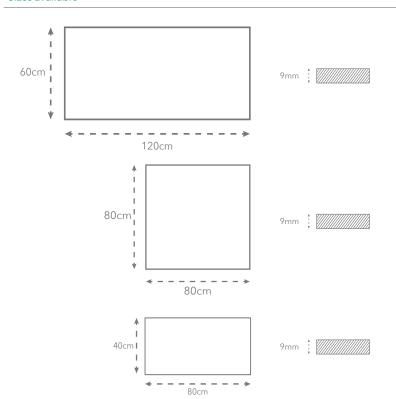





9mm ‡

### www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

# Technical Specification Code: VT.373



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 35 N/mm²
Impact Resistance	EN ISO 10545-5	-	> 0.75
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 7.1*10 <sup>-6</sup> °C <sup>-1</sup>
Resistance to Thermal Shocks	EN ISO 10545-9	-	Complies
Resistance to Crazing	EN ISO 10545-11	-	Complies
Frost Resistance	EN ISO 10545-12	UB Min.	Complies
Resistance to Chemicals	EN ISO 10545-13	Declared Value	G A
Resistance to Stains	EN ISO 10545-14	-	Minimum Class 5
Slip Resistance	DIN 51130	-	R10
	BS 7976-2:2002 Pendulum	-	

#### Certifications











