


VT.586PAV

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE




Concrete Look 20mm Paver
High Slip
EPD Group 2 - Como Range

Grip Paver


Properties




Carbon Offset




Chemical Resistant




Frost Resistant




Thermal Shock Resistant




More Colours Available




EPD GROUP 2
COMO




BREEAM




LEED




EMAS




ISO 14001




ISO 9001



R11



PTV 36+



UP TO 40%
Recycled Content

Other formats



Solid

Other finishes



Semi Polished




Natural



Grip

Sizes available

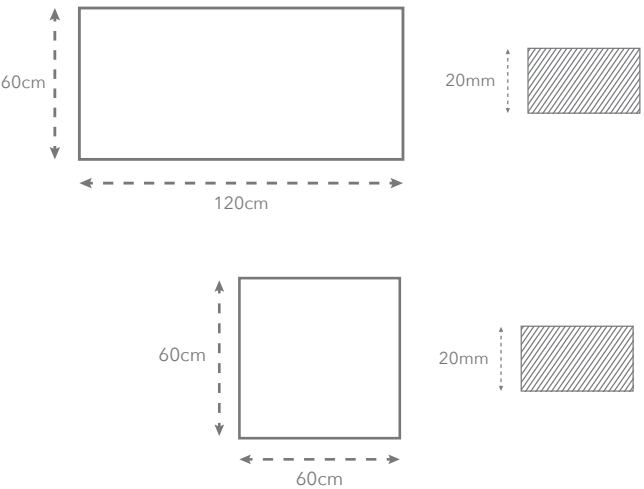

www.ecofriendlytiles.co.uk



ECO FRIENDLY
TILES®
The planet, covered

Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN
0844 980 2233
info@ecofriendlytiles.co.uk

Technical Specification

Code: VT.586PAV



Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN
0844 980 2233
info@ecofriendlytiles.co.uk
www.ecofriendlytiles.co.uk

| Physical & chemical properties | Norm/test method | Required Standard | Results |
|-----------------------------------------|-------------------------|---------------------------------------|-----------------------------------------------|
| Thickness | EN ISO 10545-2 | ± 5.0% / ± 0.5mm | ± 5.0% |
| Length and Width | EN ISO 10545-2 | ±0.6% Max | ± 0.2% |
| Linearity | EN ISO 10545-2 | ± 0.5% Max | ± 0.2% |
| Warpage | EN ISO 10545-2 | ± 0.5% Max | ± 0.2% |
| Water absorption | EN ISO 10545-3 | ≤ 0.5% | ≤ 0.06% |
| Breaking Modulus | EN ISO 10545-4 | ≥ 1300N | 50 N/mm ² (561kg/cm ²) |
| Breaking Strength | EN ISO 10545-4 | ≥ 700N | 2500 N ≥ 700N |
| Deep Abrasion Resistance | EN ISO 10545-6 | ≤ 175 mm ³ | < 143 mm ³ |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8 | < 9*10 ⁻⁶ °C ⁻¹ | < 6.5*10 ⁻⁶ °C ⁻¹ |
| Frost Resistance | EN ISO 10545-12 | - | Frost Proof |
| Resistance to Chemicals | EN ISO 10545-13 | UB Minimum | Compliant |
| Resistance to Stains | EN ISO 10545-14 | 1 < X < 5 | Class 5 |
| Colour Resistance to Light | DIN 51094 | - | No change |
| Slip Resistance | DIN 51130 | - | R11 |
| | BS 7976-2:2002 Pendulum | - | PTV 36+ |

Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.