

# VT.598H

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE




Marble Look  
Honed Finish  
EPD Group 2 - Como Range


## Honed

### Properties


  
Carbon Offset


  
Chemical Resistant


  
Frost Resistant


  
Thermal Shock Resistant


  
More Colours Available


  
COMO


  
BREEAM


  
LEED

  
EMAS

  
ISO 14001

  
ISO 9001

  
R9

  
UP TO 40% Recycled Content


### Other formats

### Other finishes

  
Anti Slip

  
Polished


### Sizes available

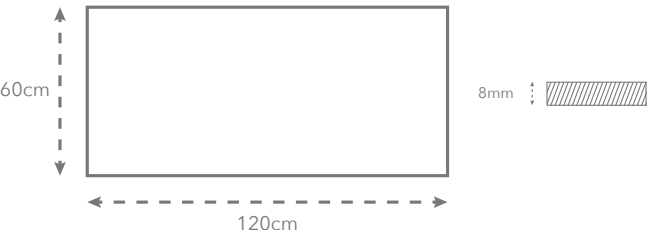

60cm

120cm


8mm

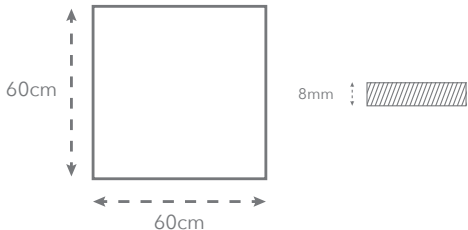

60cm

60cm

8mm



30cm

60cm

8mm

[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)



ECO FRIENDLY  
TILES®  
*The planet, covered*

Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
[info@ecofriendlytiles.co.uk](mailto:info@ecofriendlytiles.co.uk)

# Technical Specification

## Code: VT.598H



Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
info@ecofriendlytiles.co.uk  
[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% Max	± 5.0%
Length and Width	EN ISO 10545-2	±0.6% Max	± 0.1%
Linearity	EN ISO 10545-2	± 0.5% Max	± 0.1%
Rectangularity	EN ISO 10545-2	± 0.5% Max	± 0.1%
Surface Flatness	EN ISO 10545-2	± 0.5% Max	± 0.2%
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.08%
Modulus of Rupture	EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	48 N/mm <sup>2</sup>
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175 mm <sup>3</sup>	140 mm <sup>3</sup>
Thermal Expansion Coefficient	EN ISO 10545-8	-	< 6.5*10 <sup>-6</sup> °C <sup>-1</sup>
Thermal Shock Resistance	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Frost Proof
Resistance to Chemicals	EN ISO 10545-13	UB Minimum	Compliant
Resistance to Stains	EN ISO 10545-14	-	Compliant
Colour Resistance to Light	DIN 51094	-	No change in Brightness or Colour
Slip Resistance	DIN 51130	-	R9
	BS 7976-2:2002 Pendulum	-	-

### Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.